

# 1436 Series

Level T-6, E-5, O-5, P-7 Disintegrator  
NSA/CSS EPL Listed for Paper, Key Tape, CDs



## Specifications:


Media Accepted	Paper, optical, small e-media
Final Particle Size	2mm - 25mm, screen dependent
Cycle Capacity	Media dependent
Hourly Throughput	Up to 1,800 lbs. (NSA) Up to 3,000 lbs.
Feed Opening	14 in. x 36 in.
Dimensions (HxWxD) Weight	74 in. x 80 in. x 65 in. 6,200 lbs.
Electrical	3-phase 208/230/460/575V-60Hz International voltage available
Power	75HP (100HP available)
Warranty	5 year non-wear parts/90 days labor

## Standard Features:

- Solid steel rotors with twelve total hold-down bolts for two blades for maximum performance and durability
- Hour meter and safety limit switches
- Low base with air transition for security evacuation
- Equipped with evacuation transition
- Heavy duty system for high volume applications
- Made in the USA — TAA compliant

## Options and Accessories:

- Replacement/spare knives and screens
- Conveyor feed hopper
- International voltage
- At-site set-up, installation, training
- Preventive maintenance contract

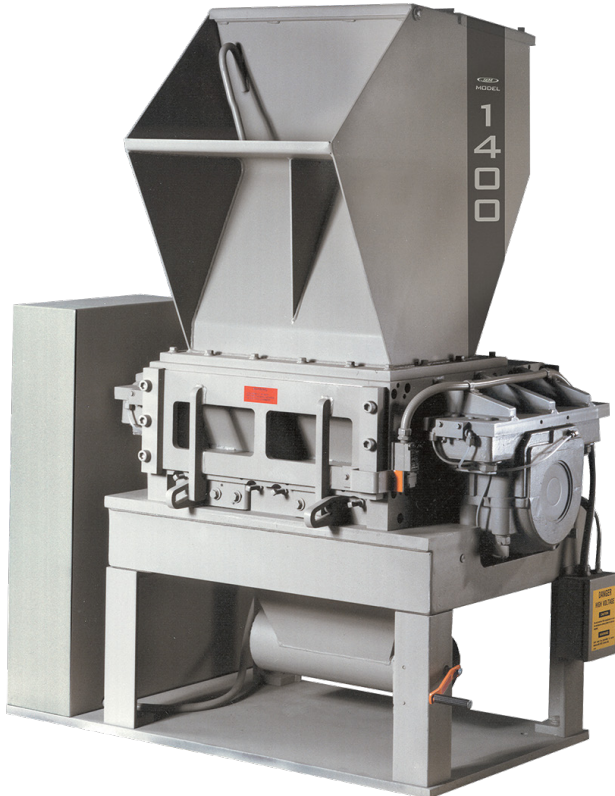

Model	1436	1436/5
Cutting System	5 blade (3 rotor, 2 bed)	7 blade (5 rotor, 2 bed)
Capacity	2,000 lbs./hr.	3,000 lbs./hr.