

22/5 Value Kit

Level T-6, E-5, O-5, P-7

NSA/CSS EPL Listed for Paper, Key Tape, CDs




Global Leader in High Security Information
End-of-Life Solutions for Over 50 Years

Specifications:

Media Accepted	Paper, optical, small e-media
Final Particle Size	2mm - 25mm, depending on screen
Cycle Capacity	Media dependent
Hourly Throughput	Up to 800 lbs. (NSA rated) Up to 1,600 lbs.
Feed Opening	12 in. x 20 in.
Waste Collection	Dual bag with separate bottomless filter for bagged dust collection
Dimensions (HxWxD) Weight	74 in. x 38 in. x 48 in. (disintegrator) 2,470 lbs. (disintegrator)
Electrical	3-phase: 460V-60Hz International voltage available
Power	20HP (disintegrator) 1.5HP (air collection system)
Warranty	5 year non-parts/90 days labor

Standard Features:

- Solid steel rotors with seven hold-down bolts per blade for maximum performance and durability
- Hour meter and safety limit switches
- Soundproofed base and feed hopper
- Opti-angle cutting system with heavy duty solid flywheel
- Solid steel rotor for maximum cutting inertia with no open or hollow spaces
- Solid rotor designed to provide 70% more rotor mass than open rotor designs
- Low base with air transition for security evacuation
- Equipped with 5 in. transition
- Compact footprint for use in smaller spaces
- Made in the USA — TAA compliant

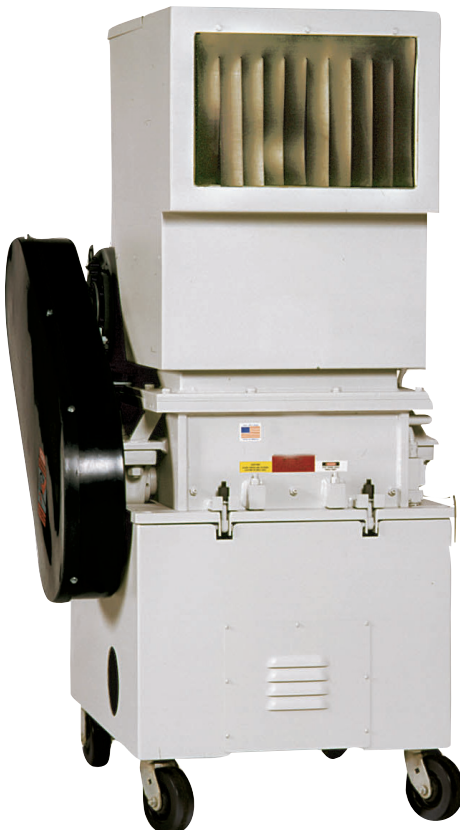

22/5 VK compatible with SEM Air System, shown above.

22/5 VKE

Level T-6/E-5/O-5/P-7

NSA/CSS EPL Listed for Paper, Key Tape, CDs



Value Kit Features:

- **Energy Efficient:** 15HP, 3-phase motor with a customizable voltage at order
- **Seven Blade Cutting System:** five bladed solid steel rotor and two stationary knives that provides maximum cutting inertia
- **Hour Meter:** facilitates routine maintenance schedule
- **Push Button Controls:** for operator convenience
- **Visual Load Meter:** custom light indicator to prevent overfeeding, clogging, or jamming
- **Dual Bag Waste Collection System:** provides greater collection volume for bulk destruction projects at 0.75HP 120V/1/60 or 220V/1/50
- **Bottomless High Efficiency Filter Kit:** to maintain a clean operator friendly work environment
- **Machine Sound Proofing:** minimizes mechanical noise in disintegrator base and hopper
- **Customized MX Sound Enclosures:** STC 37 rated and encloses both the disintegrator and waste collection system. Gasket sealed and reduces sound levels by 15 to 25 dBa
- **Integrated Operator Control Center:** contains auto-timed shutdown feature, key-lock, and one button system start/stop controls
- **Disintegrator Maintenance Kit:** contains a spare set of knives, tools required for routine maintenance, and a starter kit of three cases [50 bags/case] of heavy-duty 3-mil waste collection bags
- **Includes Junction Box:** Plug and play electrical wiring for operator control center
- **Safe Design:** Fire retardant, steel construction with 22 ga outer panel and 16 ga perforated inner panel with 2 in. fill 6 lb./cu/ft of encapsulated mineral wool

- A** Disintegrator
- B** Sound Enclosure
- C** Waste Collection System

